

5,8 x 2,3 x 70 mm



Spannung 250 V / 60 V **Strom** 2 A **Typ**
Voltage **Current** **Type** **Radial**



Norm / Standard:

IEC 60691

Anschluss / Connection:

Rundstifte, Abstand 3,7 mm
Oberfläche verzinnt, steckbar und lötlbar /
Round pins, distance 3,7 mm
Surface tin-plated, pluggable and solderable

Verpackungsmöglichkeiten / Packing options:

1.000 St. = lose geschüttet in Polybeutel /
1.000 pcs. = bulk in plastic bag


Bemessungswerte / Ratings:

Art. No.	I _N	U _N (AC / DC) [V]	T _N ¹⁾ [°C]	T _H [°C]	T _{max} [°C]	UR	cUR	VDE	TÜV	PSE	CCC	KC
710.076-S	2 A	250 AC	76	53	200	•	•			•	•	
710.086-S	2 A	250 AC 60 DC	86	61	200	•	•	•		•	•	•
710.102-S	2 A	250 AC 60 DC	102	79	200	•	•	•	•	•	•	•
710.115-S	2 A	250 AC 60 DC	115	91	200	•	•	•	•	•	•	•
710.125-S	2 A	250 AC 60 DC	125	100	200	•	•	•	•	•	•	•
710.130-S	2 A	250 AC	130	106	200	•	•	•	•	•	•	•
710.133-S	2 A	250 AC	133	111	200	•	•	•		•	•	•
710.135-S	2 A	250 AC	135	111	200	•	•	•		•	•	•
710.136-S	2 A	250 AC	136	112	200	•	•	•		•	•	•
710.145-S	2 A	250 AC	145	121	200	•	•	•		•	•	•
710.150-S	2 A	250 AC	150	126	200	•	•	•	•	•	•	•
710.160-S	2 A	250 AC	160	135	200					•	•	•
710.205-S	2 A	250 AC	205	169	250	•	•		•		•	
710.221-S	2 A	250 AC	221	188	250	•	•		•		•	

¹⁾ Toleranz / Tolerance: +0 / - 10 °C (IEC 60691)

Legende / Caption:

I_N = Bemessungsstrom / Rated current
U_N = Bemessungsspannung / Rated voltage
T_N = Bemessungstemperatur / Rated functioning temp.
T_H = Haltetemperatur / Holding temperature
T_{max} = max. Grenztemperatur / max. temp. limit

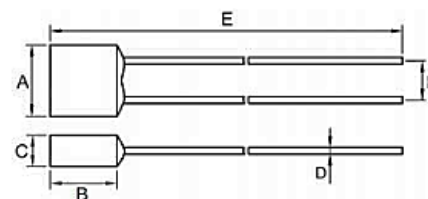

Dimensions (mm)

A	B	C	D (Φ)	E	F*
5.8±0.5	5.8±0.5	2.3±0.2	0.54±0.05	70±3	3.7±0.5

Note: The dimension F is measured from the root of leadwires.