

5,8 x 2,3 x 70 mm



| | | | | | |
|----------------------------|---------------------|-------------------------|------------|--------------------|---------------|
| Spannung Voltage | 250 V / 60 V | Strom Current | 3 A | Typ Type | Radial |
|----------------------------|---------------------|-------------------------|------------|--------------------|---------------|



Norm / Standard: IEC 60691

Anschluss / Connection: Rundstifte, Abstand 3,7 mm
 Oberfläche verzinnt, steckbar und lötlbar /
 Round pins, distance 3,7 mm
 Surface tin-plated, pluggable and solderable

Verpackungsmöglichkeiten / Packing options: 1.000 St. = lose geschüttet in Polybeutel /
 1.000 pcs. = bulk in plastic bag


Bemessungswerte / Ratings:

| Art. No. | I _N | U _N (AC / DC) [V] | T _N ¹⁾ [°C] | T _H [°C] | T _{max} [°C] | UR | cUR | VDE | TÜV | PSE | CCC | KC |
|-----------|----------------|---------------------------------|--------------------------------------|------------------------|--------------------------|----|-----|-----|-----|-----|-----|----|
| | | | | | | ● | ● | ● | ● | ● | ● | ● |
| 720.076-S | 3 A | 250 AC | 76 | 53 | 200 | ● | ● | | | ● | ● | |
| 720.086-S | 3 A | 250 AC 60 DC | 86 | 61 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.102-S | 3 A | 250 AC 60 DC | 102 | 79 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.115-S | 3 A | 250 AC 60 DC | 115 | 91 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.125-S | 3 A | 250 AC 60 DC | 125 | 100 | 200 | ● | ● | ● | | ● | ● | |
| 720.130-S | 3 A | 250 AC | 130 | 106 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.133-S | 3 A | 250 AC | 133 | 111 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.135-S | 3 A | 250 AC | 135 | 111 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.136-S | 3 A | 250 AC | 136 | 112 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.145-S | 3 A | 250 AC | 145 | 121 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.150-S | 3 A | 250 AC | 150 | 126 | 200 | ● | ● | ● | | ● | ● | ● |
| 720.160-S | 3 A | 250 AC | 160 | 135 | 200 | | | | | ● | ● | |
| 720.205-S | 3 A | 250 AC | 205 | 169 | 250 | ● | ● | | ● | | ● | ● |
| 720.221-S | 3 A | 250 AC | 221 | 188 | 250 | ● | ● | | ● | | ● | ● |

¹⁾ Toleranz / Tolerance: +0 / - 10 °C (IEC 60691)

Legende / Caption:

- I_N = Bemessungsstrom / Rated current
- U_N = Bemessungsspannung / Rated voltage
- T_N = Bemessungstemperatur / Rated functioning temp.
- T_H = Haltetemperatur / Holding temperature
- T_{max} = max. Grenztemperatur / max. temp. limit

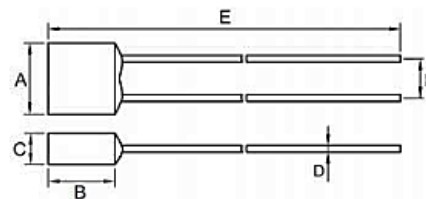

Dimensions (mm)

| A | B | C | D(Φ) | E | F* |
|---------|---------|---------|-----------|------|---------|
| 5.8±0.5 | 5.8±0.5 | 2.3±0.2 | 0.54±0.05 | 70±3 | 3.7±0.5 |

Note: The dimension F is measured from the root of leadwires.