


6,6 x 2,6 x 70 mm



Spannung	250 V	Strom	5 A	Typ	Radial
Voltage		Current		Type	



Norm / Standard:

IEC 60691

Anschluss / Connection:

Rundstifte, Abstand 3,7 mm
 Oberfläche verzinnt, steckbar und lötlbar /
 Round pins, distance 3,7 mm
 Surface tin-plated, pluggable and solderable

Verpackungsmöglichkeiten / Packing options:

100 St. = lose geschüttet in Polybeutel /
 100 pcs. = bulk in plastic bag


Bemessungswerte / Ratings:

Art. No.	I _N	U _N [V]	T _N ¹⁾ [°C]	T _H [°C]	T _{max} [°C]	UR	cUR	VDE	PSE	CCC	KC
730.084-X	5 A	250	84	65	203	•	•	•	•	•	•
730.102-X	5 A	250	102	80	203	•	•	•	•	•	•
730.115-X	5 A	250	115	95	203	•	•	•	•	•	•
730.125-X	5 A	250	125	105	203	•	•	•	•	•	•
730.130-X	5 A	250	130	107	203	•	•	•	•	•	•
730.135-X	5 A	250	135	115	203	•	•	•	•	•	•
730.138-X	5 A	250	138	115	203	•	•	•	•	•	•
730.145-X	5 A	250	145	126	203	•	•	•	•	•	•
730.150-X	5 A	250	150	128	203	•	•	•	•	•	•
730.160-X	5 A	250	160	135	203	•	•	•	•	•	•

¹⁾ Toleranz / Tolerance: +0 / - 10 °C (IEC 60691)

Legende / Caption:

I_N = Bemessungsstrom / Rated current
 U_N = Bemessungsspannung / Rated voltage
 T_N = Bemessungstemperatur / Rated functioning temp.
 T_H = Haltemperatur / Holding temperature
 T_{max} = max. Grenztemperatur / max. temp. limit

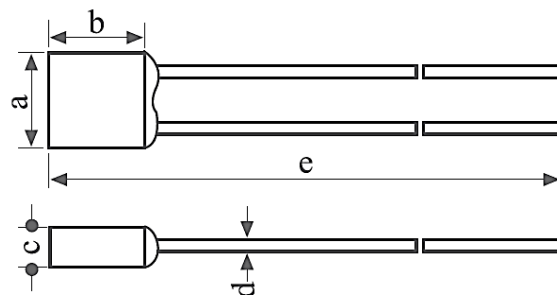

a	b	c	d	e
6,6±0,5	8,0±0,5	2,6±0,3	∅0,6±0,02	70±3

Angaben / Dimension in [mm]