


8,3 x 3,4 x 45 mm



Spannung Voltage	250 V	Strom Current	10 A	Typ Type	Radial
----------------------------	--------------	-------------------------	-------------	--------------------	---------------



Norm / Standard: IEC 60691

Anschluss / Connection: Rundstifte, Abstand 5,0 mm
 Oberfläche verzinnt, steckbar und lötlbar /
 Round pins, distance 5,0 mm
 Surface tin-plated, pluggable and solderable

Verpackungsmöglichkeiten / Packing options: 100 St. = lose geschüttet in Polybeutel /
 100 pcs. = bulk in plastic bag


Bemessungswerte / Ratings:

Art. No.	I _N	U _N [V]	T _N ¹⁾ [°C]	T _H [°C]	T _{max} [°C]	UR	cUR	VDE	CCC
731.102-X	10 A	250	102	72	203	●	●	●	
731.115-X	10 A	250	115	85	203	●	●	●	●
731.130-X	10 A	250	130	100	203	●	●	●	●
731.135-X	10 A	250	135	106	203	●	●	●	
731.138-X	10 A	250	138	109	203	●	●	●	

¹⁾ Toleranz / Tolerance: +0 / - 10 °C (IEC 60691)

Legende / Caption:

- I_N = Bemessungsstrom / Rated current
- U_N = Bemessungsspannung / Rated voltage
- T_N = Bemessungstemperatur / Rated functioning temp.
- T_H = Haltezeittemperatur / Holding temperature
- T_{max} = max. Grenztemperatur / max. temp. limit

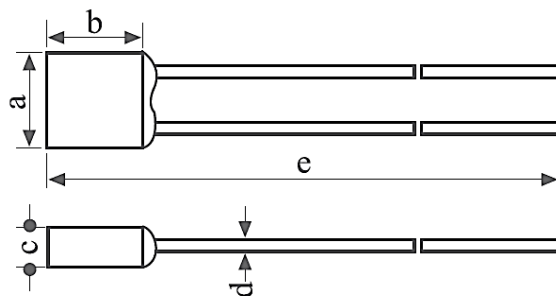

a	b	c	d	e
8.3 ± 0.5	7.5 ± 0.5	3.4 ± 0.3	F1.0 ± 0.05	45 ± 3

Angaben / Dimension in [mm]