

Ø 2,4 x 6,5 mm



Spannung 250 V **Strom** 1 A **Typ** Axial
Voltage **Current** **Type**



Norm / Standard: IEC 60691
Anschluss / Connection: Rundstifte, Oberfläche verzinnt, steckbar und lötlbar / Round pins, Surface tin-plated, pluggable and solderable
Verpackungsmöglichkeiten / Packing options: 100 St. = lose geschüttet in Polybeutel / 100 pcs. = bulk in plastic bag


Bemessungswerte / Ratings:

Art. No.	I _N	U _N [V]	T _N ¹⁾ [°C]	T _H [°C]	T _{max} [°C]	UR	cUR	VDE	PSE	CCC	KC
735.102-X	1 A	250	102	80	200	●	●	●	●	●	●
735.115-X	1 A	250	115	99	200	●	●	●	●	●	●
735.125-X	1 A	250	125	105	200	●	●	●	●	●	●
735.130-X	1 A	250	130	107	200	●	●	●	●	●	●
735.135-X	1 A	250	135	115	200	●	●	●	●	●	●
735.138-X	1 A	250	138	118	200	●	●	●	●	●	●
735.145-X	1 A	250	145	126	200	●	●	●	●	●	●
735.150-X	1 A	250	150	128	200	●	●	●	●	●	●
735.223-X	1 A	250	223	190	280	●	●	●	●	●	●

¹⁾ Toleranz / Tolerance: +0 / - 10 °C (IEC 60691)

Legende / Caption:

- I_N = Bemessungsstrom / Rated current
- U_N = Bemessungsspannung / Rated voltage
- T_N = Bemessungstemperatur / Rated functioning temp.
- T_H = Haltetemperatur / Holding temperature
- T_{max} = max. Grenztemperatur / max. temp. limit

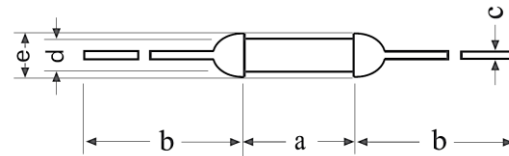

a	b	c	d	e
6.5 ± 0.5	38 ± 3	Ø0.54 ± 0.05	Ø 2.1 ± 0.1	2.4 or below

Angaben / Dimension in [mm]