

Ø 4,0 x 10,5 mm

Version: lang-lang / long-long



<b>Spannung</b> Voltage	<b>250 V</b>	<b>Strom</b> Current	<b>20 A</b>	<b>Typ</b> Type	<b>Axial</b>
----------------------------	--------------	-------------------------	-------------	--------------------	--------------



**Spezifikation / Specification:**

Anschluss / Connection:

Rundstifte (lang-lang),  
 Oberfläche verzinnt, steckbar und lötfar /  
 Round pins (long-long),  
 Surface tin-plated, pluggable and solderable

(kurz-lang-Version: ESKA 778.000) /  
 (short-long-version: ESKA 778.000)

Max. Unterbrechungsstrom /  
 max. interrupting current

22,5 A @ 250V AC

Max. Transienter Überlastsstrom /  
 max. Transient overload current

3 ms @ 300 A DC

Verpackungsmöglichkeiten / Packing options:


500 St. = lose geschüttet in Polybeutel /  
 500 pcs. = bulk in plastic bag  
 5.000 St. = auf Rolle gegurtet  
 (= z.B.: 779.072G) /  
 5.000 pcs. = taped and reeled  
 (= e.g.: 779.072G)

**Bemessungswerte / Ratings:**

Art. No.	I <sub>N</sub>	U <sub>N</sub> [V]	T <sub>N</sub> [°C]	T <sub>H</sub> [°C]	T <sub>max</sub> (VDE) [°C]	UR	cUR	VDE	TÜV	PSE	CCC	KC
779.072	20 A	250	72 (+2°C / -2°C)	47	120							●
779.077	20 A	250	77 (+0°C / -4°C)	52	120							●
779.084	20 A	250	84 (+0°C / -5°C)	59	150							●
779.093	20 A	250	93 (+0°C / -5°C)	68	220	●	●	●			●	●
779.098	20 A	250	98 (+0°C / -2°C)	73	220							●
779.109	20 A	250	109 (+0°C / -5°C)	94	190							●
779.121	20 A	250	121 (+0°C / -5°C)	96	230	●	●	●			●	●
779.128	20 A	250	128 (+0°C / -5°C)	103	270							●
779.144	20 A	250	144 (+0°C / -5°C)	119	290	●	●	●			●	●
779.152	20 A	250	152 (+0°C / -4°C)	127	290	●	●	●			●	●
779.167	20 A	250	167 (+0°C / -4°C)	142	290	●	●	●			●	●
779.184	20 A	250	184 (+0°C / -6°C)	159	300	●	●	●			●	●
779.195	20 A	250	195 (+0°C / -6°C)	170	300							●
779.216	20 A	250	216 (+0°C / -6°C)	200	370							●
779.228	20 A	250	228 (+0°C / -6°C)	200	370							●
779.240	20 A	250	240 (+0°C / -6°C)	200	370	●	●	●				●

**Legende / Caption:**

- I<sub>N</sub> = Bemessungsstrom / Rated current
- U<sub>N</sub> = Bemessungsspannung / Rated voltage
- T<sub>N</sub> = Bemessungstemperatur / Rated functioning temp.
- T<sub>H</sub> = Haltemperatur / Holding temperature
- T<sub>max</sub> = max. Grenztemperatur / max. temp. limit

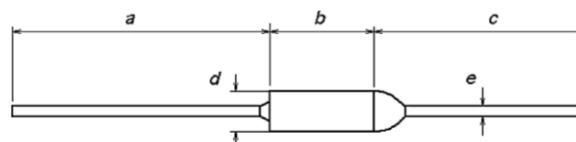

Abmessungen / dimensions [mm]	a	b	c	d	e
Lang / long	35,0 ± 1,0	10,5 ± 0,5	35,0 ± 1,0	4,0 ± 0,05	1,0